



The double deck Terex Finlay 693+ has been designed and developed to fulfill the demands of today's high production producer. The double deck screen configuration provides two full sized 20' x 5' (6.1m x 1.525m) screen decks. A high capacity belt feed hopper is available with remote tipping grid or double deck vibrating grid. Impressive features include hydraulic tipping reject grid complete with grouser bars, three on-board hydraulic folding conveyors and low level greasing access points. Washing equipment can be fitted to the screenbox if required.


Features:

- ▶ The double deck 6.1m x 1.525m (20' x 5') screen box with full catwalk access is the largest and most accessible in it's class.
- ▶ A combination of quick wedge tensioning on the top deck and hydraulic tensioning on the bottom deck ensure mesh set up and change out times are kept to an absolute minimum.
- ▶ Maximum utilisation of the 6.1m x 1.525m (20' x 5') decks provide ultra-efficient screening capacities even at small aggregate sizes.
- ▶ Screen box angle can be hydraulically adjusted to an angle between 18° and 30°.

Transport Dimensions



Working Dimensions

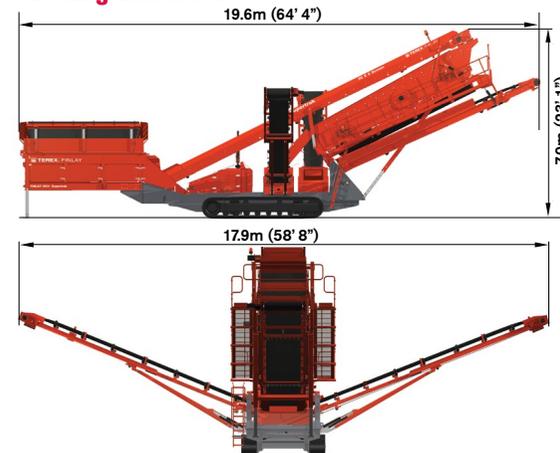

Maximum Plant Capacity:	tph**	Stph**
	550	606

**Material is based on pit run sand/gravel with bulk density 1/6T/cu.mm Screening capacity depends upon mesh sizes and relates to dry screening in optimal material conditions.

Machine Weight: * 33,500Kgs (73,850 lbs) * With tipping grid



TEREX® | FINLAY



Inclined Screen 693+