
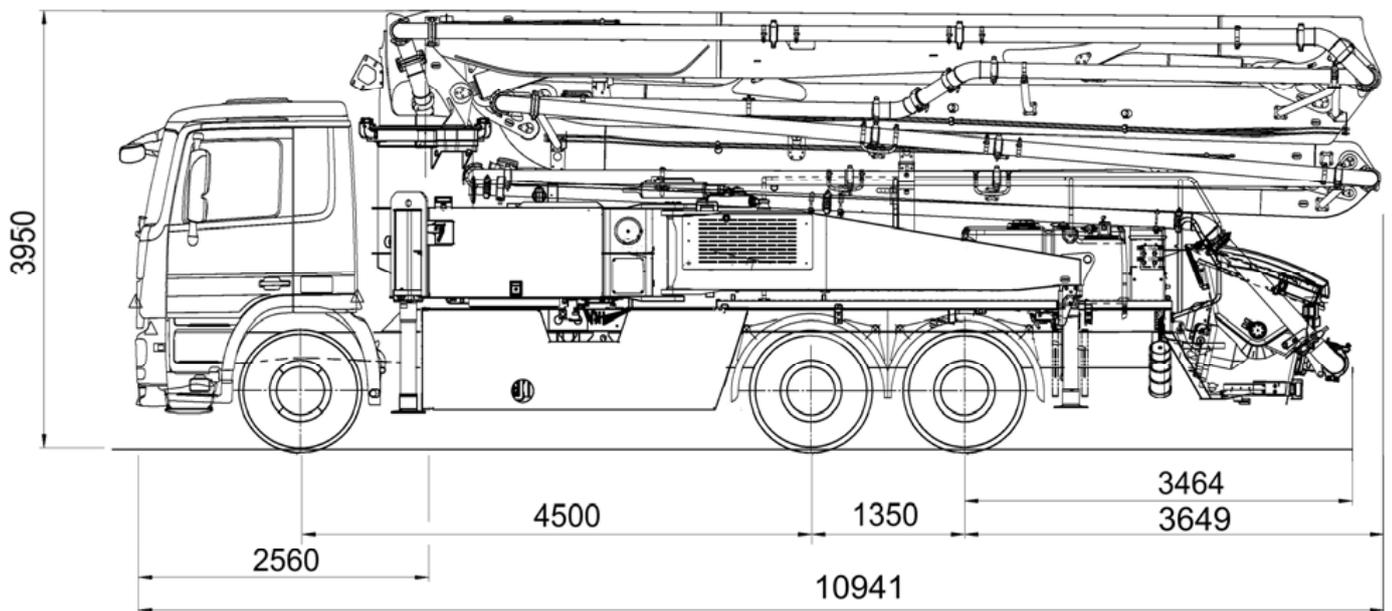


Putzmeister

Truck-mounted concrete pump BSF 36-4.16 H

.16 H LS

Output up to 160 m³/h
Delivery pressure up to 85 bar*



Note: Standard version. Dimensions and weights depend on truck, pump model and equipment.
Dimensions in mm, MB-Actros 2632 Euro 5 as example.




Technical data

Boom M 36-4 Gen. 9		
Sections		4
Reach height	m	35.6
Horizontal reach	gross	m 31.4
	net	m 28.9
Reach depth max.	m	23.9
Unfolding height	m	8.5
End hose length	m	4
Folding system		Z
Delivery line		DN 125


Pump		BSF	.16 H	.16H LS
Rod side	Output	m ³ /h	160	-
	Delivery pressure	bar	85	-
	Strokes	1/min.	31	-
Piston side	Output	m ³ /h	-	160
	Delivery pressure	bar	-	85
	Strokes	1/min.	-	26
	Delivery cylinder	Ø mm	230	250
	Stroke	mm	2100	2100

*) Delivery line boom max. 85 bar.
All data maximum theoretical.

Reach information diagram, Support, Performance diagram

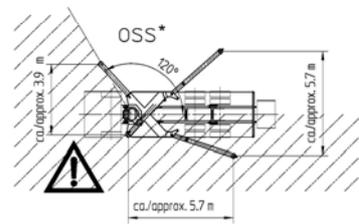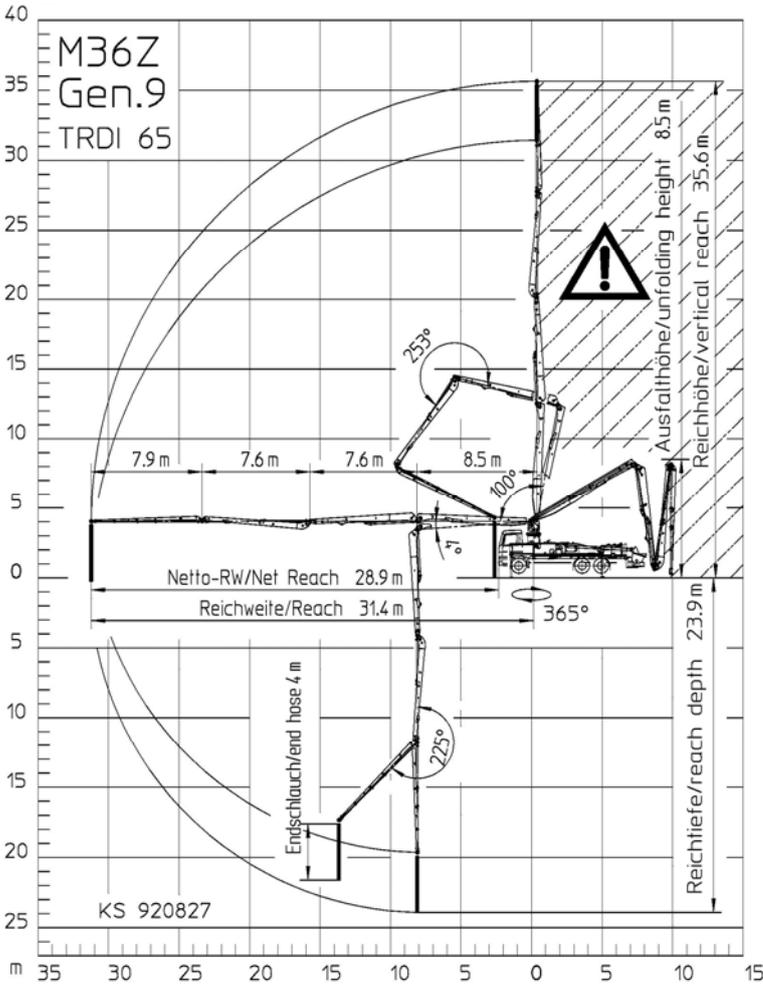

*) OSS not included in series range
OSS ist nicht im Serienumfang enthalten

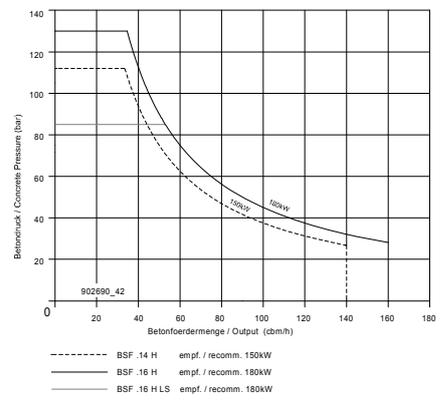

All data max. theor.



Range in which you must not work with the end hose.

Serial delivery scope

Agitator and water pump radio remote / on-site controlled	Ergonic Graphic Display (EGD) with machine-failure-management	Rubber collar at hopper
Agitator safety cutout (RSA) in RFID with self-start protection	Ergonic Pump System (EPS) incl. Ergonic Output Control (EOC)	Spectacle wear plate DURO 22
Box for delivery slip	Flushing water pump 160 l/min 25 bar	Splash guard fixed
Box for sponge ball	Guardrail right side / grab left side	Spray hose 10 m incl. bracket
C-Pipe connection for filling water tank	Hinged elbow with cleaning port	Storage box, plastic, black
Cardan shaft maintenance free	Chassis horn via remote control on hopper	S-transfer tube switchover normal/fast
Central lubrication hopper, electrically	Hydraulic spare hose in hose-package	Support plates at slewing legs in holder
Concrete hopper RS 909 with agitator	Operating manual certified (1 x Paper, 1 x CD-Rom), spare part list	Tool set incl. standard equipment
Connections for hydraulic emergency supply	Platform non-skid	Towing eye
Delivery cylinder chrome plated	Pump on/off dependent on speed	Wateroutlet for small amounts at hopper (1/2")
Delivery line (1-layer) PM 40, arm assembly	Radio remote control proportional with display	Watertank 800 l
Delivery piston "compact" (16 H), „single“ (16 H LS)	Rear steps, 1st step foldable	Working light for lightening of hopper
Diagnose interface	Remote control with 40 m cable, without display	
End hose 4,0 m DN 125		

See quotation for exact serial delivery scope.
Comprehensive range of options available on request.